

1/3

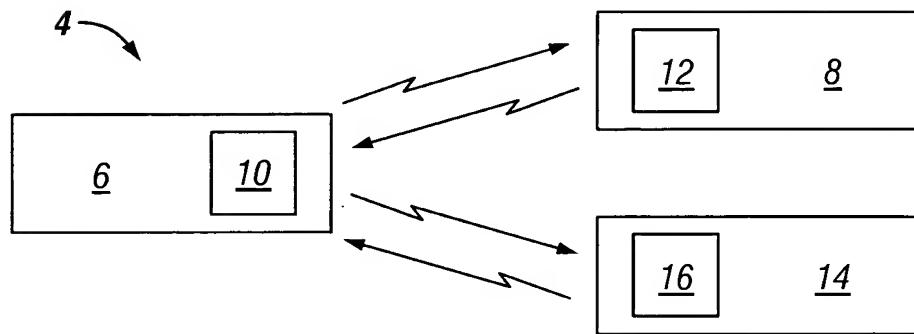


FIG. 1

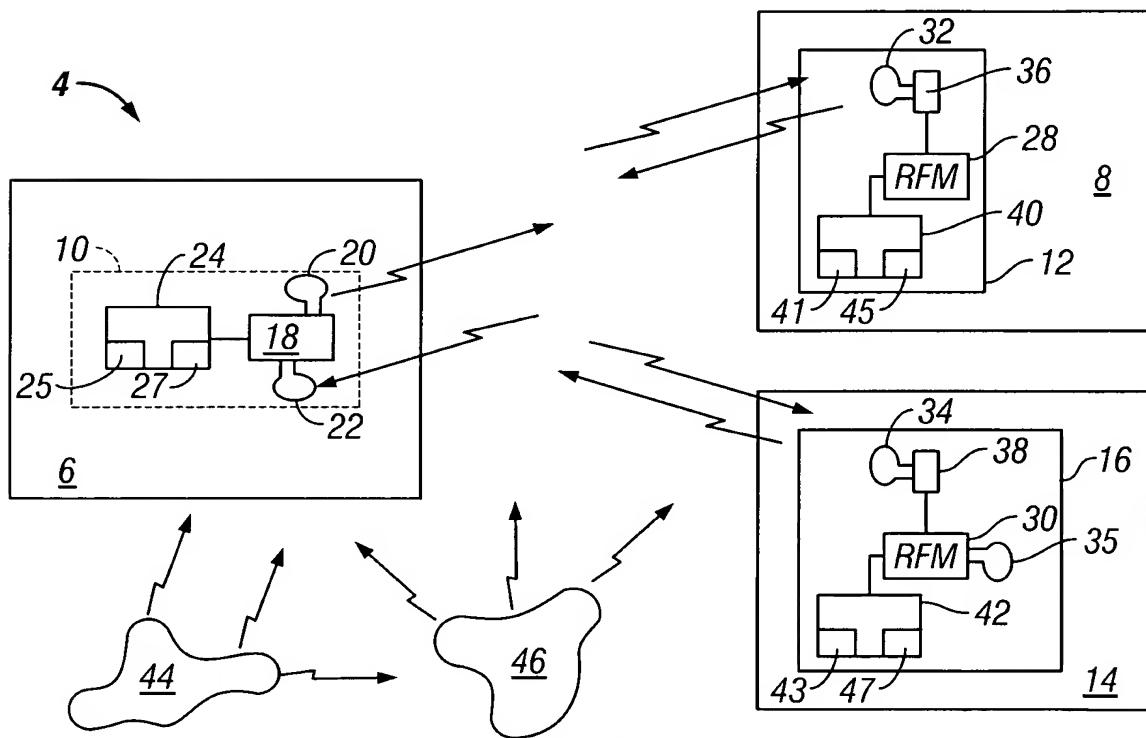


FIG. 2A

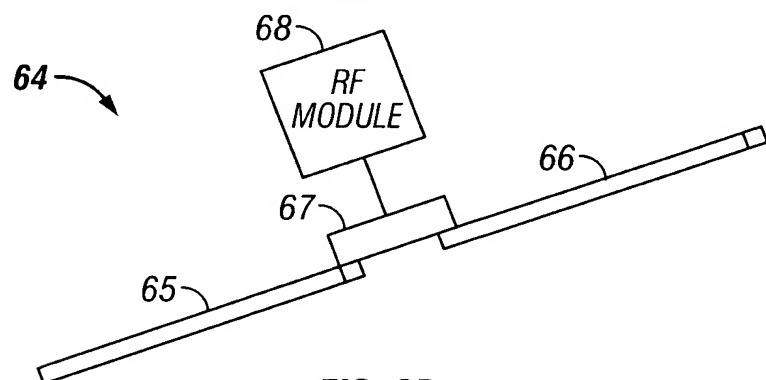


FIG. 2B

2/3

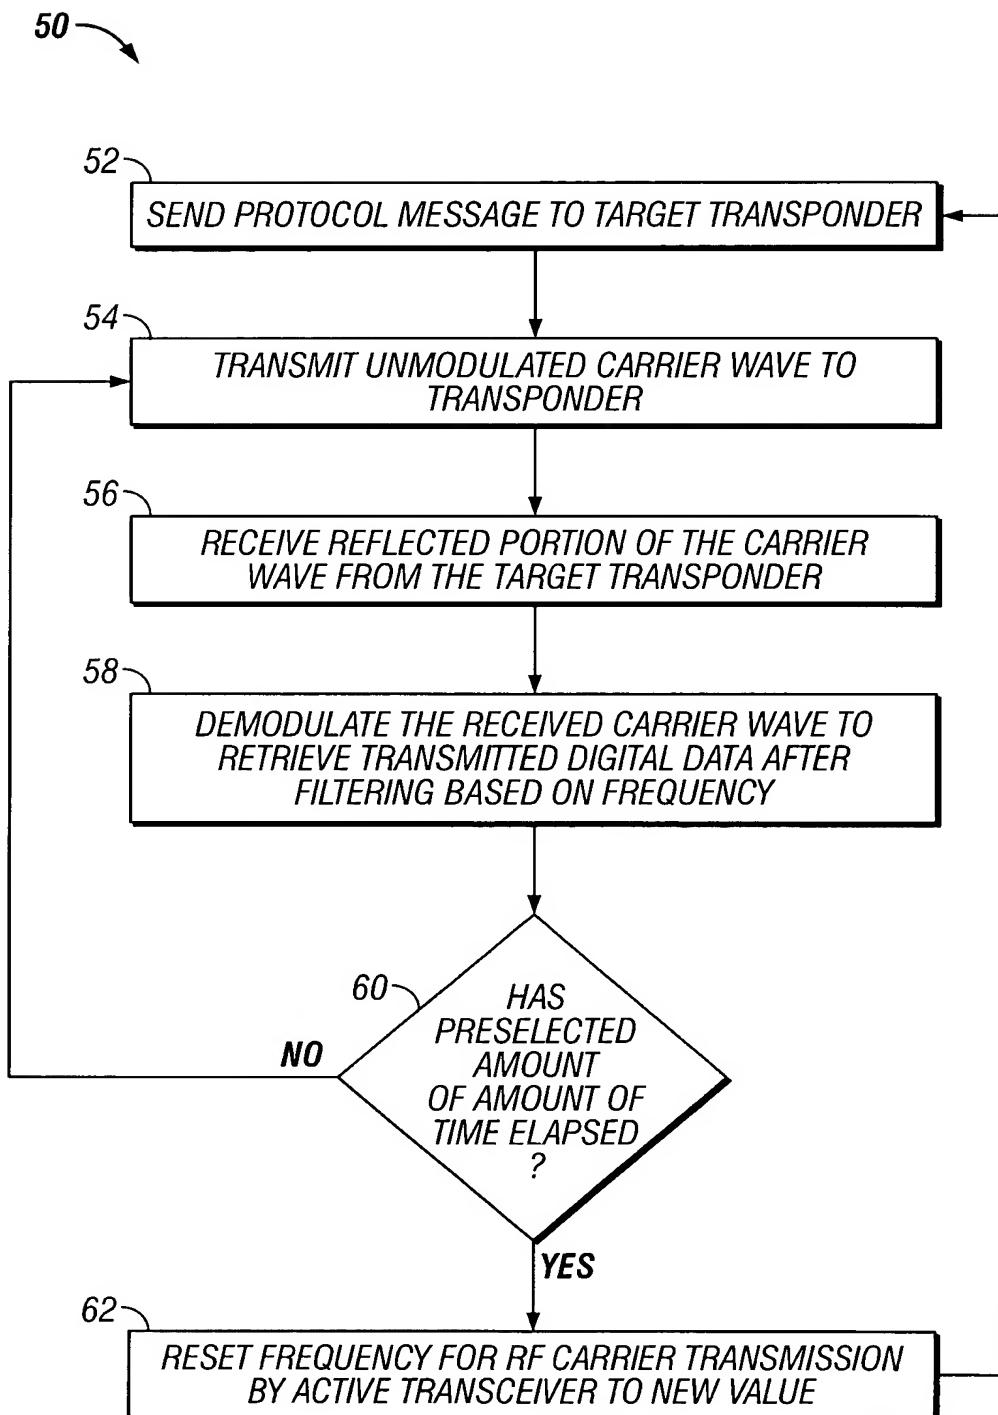


FIG. 3

3/3

70

72

RECEIVE PROTOCOL MESSAGE FROM
ACTIVE TRANSCEIVER

74

DEMODULATE PROTOCOL MESSAGE AND PERFORM
SETUP PROCEDURES FOR DATA TRANSMISSION

76

RECEIVE UNMODULATED CARRIER WAVE
FROM ACTIVE TRANSCEIVER

78

MODULATE TRANSPONDER'S REFLECTIVITY
TO REFLECT A PORTION OF CARRIER WAVE
BACK TO ACTIVE TRANSCEIVER

80

MODULATE TRANSPONDER'S REFLECTIVITY TO
REFLECT A PORTION OF ANOTHER CARRIER WAVE
HAVING A NEW CARRIER FREQUENCY

FIG. 4